


High Pressure Cleaner

Hot water, stationary, gas heating - Series HSC

HSC1140-INOX Gas

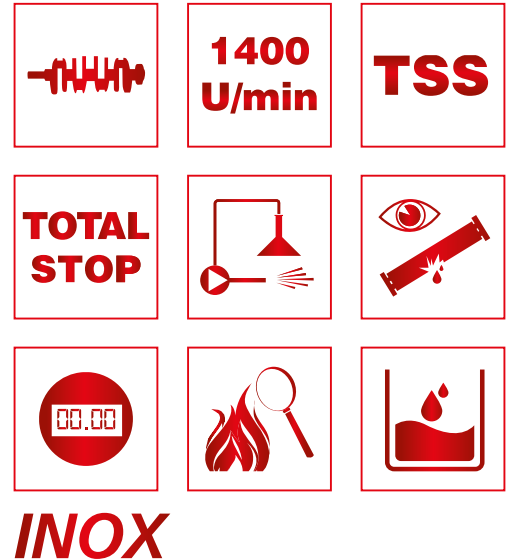

Type		HSC1140-INOX Gas
Voltage	3/PE/AC/50Hz/415V	<ul style="list-style-type: none"> ▶ Stainless steel (food safe) ▶ Etronic II - Controls ▶ 10m HP-Hose DN08 - 315bar ▶ Trigger-Gun with swivel ▶ Spray-Lance 900mm c/w Nozzle Protection ▶ Stainless-Steel Jet-Nozzle 25° ▶ Water-Supply separation acc. water reg. ▶ Chemical supply in high-pressure Jet c/w Metering-valve
Operating pressure	30-180bar/3-18MPa	
Max. pressure	200bar/20MPa	
Discharge capacity	300-1000l/h	
Nozzle size	055	
Hot water capacity	30-70°C	
Pump speed	1400rpm	
Heating power	50kW	
Connected load	6,5kW/11,7A	
Electrical protection	3x16A slow-blowing	
Weight net/with package		313kg/330kg
Dimensions device/with package (LxWxH)		1220x755x1625mm/1250x815x1755mm
<p>Self-supporting, robust, device-chassis made out of stainless-steel, suitable for floor installation, stainless-steel hotwater-boiler with 65l capacity with pre-heating and buffer storage for immediate hot-water use and hot-water preparation during stand-by operation, triplex-piston pump with chrome nickel pump head (hot-water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (start-stop system with switch-off delay, stand-by system for heating, OPH-counter with service information, low-water cut-off), unloader safety-valve c/w infinitely variable pressure and quantity regulation, seperate space for 2x 20l cleaning detergent-container c/w remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. Pump, heating and detergent, 7,5m connection cable.</p>		
Art. No.		52701