


High Pressure Cleaner

Hot water, stationary, oil heated - Series HSC

HSC1140

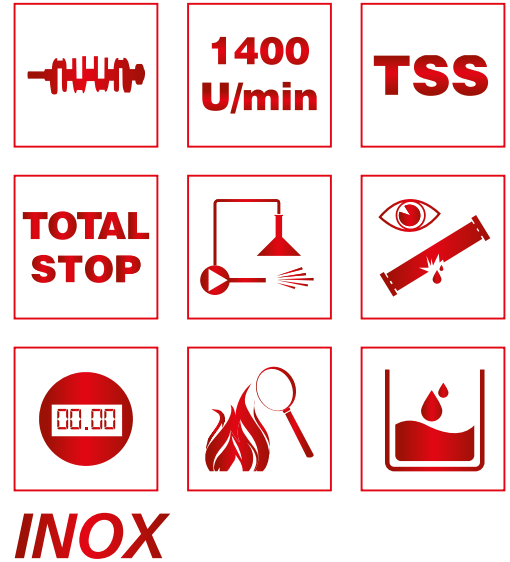

Type		HSC1140	HSC1140-INOX
Voltage	3/PE/AC/50Hz/415V	▶ Etronic II - Controls	▶ Stainless steel (food safe)
Operating pressure	30-180bar/3-18MPa	▶ 10m HP-Hose DN08 - 315bar	▶ Etronic II - Controls
Max. pressure	200bar/20MPa	▶ Trigger-Gun with swivel	▶ 10m HP-Hose DN08 - 315bar
Discharge capacity	300-1000l/h	▶ Spray-Lance 900mm c/w Nozzle- Protection	▶ Trigger-Gun with swivel
Nozzle size	055	▶ Stainless-Steel Jet-Nozzle 25°	▶ Spray-Lance 900mm c/w Nozzle-Protection
Hot water capacity	30-98°C	▶ Water-Supply separation acc. water reg.	▶ Stainless-Steel Jet-Nozzle 25°
Pump speed	1400rpm	▶ Chemical supply in high-pressure Jet c/w Metering-valve	▶ Water-Supply separation acc. water reg.
Connected load	6,5kW/11,7A		▶ Chemical supply in high-pressure Jet c/w Metering-valve
Electrical protection	3x16A slow-blowing		
Weight net/with package		301kg/318kg	300kg/317kg
Dimensions device/with package (LxWxH)		1220x755x1625mm/1250x815x1755mm	1220x755x1625mm/1250x815x1755mm
Self-supporting, robust, device-chassis made from galvanized steel and powder-coated (option INOX: device-chassis made out of stainless-steel), suitable for floor installation, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (start-stop system with switch-off delay, total-switch-off after 20min, OPH-counter with service information, optical flame monitoring with photoelectric cell and fault indicator-light) 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, integrated diesel-tank 60l, separate space for 2 x 20l cleaning detergent-container c/w Remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. Pump, heating and detergent, 7,5m connection cable.			
Art. No.		52702	527