


High Pressure Cleaner

Cold water, mobile - Series 4x4 Food Version

KD1140-F - with stainless steel pump, hot water resistant

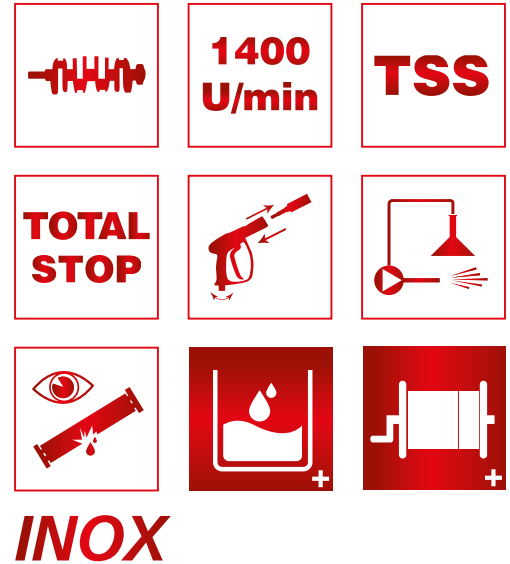

Type		KD1140-F-Standard	KD1140-F-Premium
Voltage	3/PE/AC/50Hz/415V	<ul style="list-style-type: none"> ▶ 10m HP-Hose DN08 - 315bar blue ▶ Trigger-Gun with swivel ▶ Double Spray-Lance 900mm c/w Nozzle-Protection ▶ Stainless-Steel Jet-Nozzle 25° ▶ 25l Cleaning-Detergent tank ▶ Detergent-Supply c/w Low-Pressure Injector and Metering-valve 	<ul style="list-style-type: none"> ▶ Hose-Reel ▶ 15m HP-Hose DN08 - 315bar blue ▶ Trigger-Gun with swivel ▶ Double Spray-Lance 900mm c/w Nozzle-Protection ▶ Stainless-Steel Jet-Nozzle 25° ▶ Spray-Lance 900mm c/w Rotary-Nozzle ▶ 17l Water-Storage tank ▶ Water-Supply separation acc. water reg. ▶ Chemical supply in high-pressure Jet c/w Metering-valve
Operating pressure	30-180bar/3-18MPa		
Max. pressure	200bar/20Mpa		
Discharge capacity	300-1.000l/h		
Nozzle size	055		
Max. Inlet temperature	80°C		
Pump speed	1400rpm		
Connected load	6,9kW/12,5A		
Electrical protection	3x16A slow-blowing		
Weight net/with package		89kg/113kg	97kg/121kg
Dimensions device/with package (LxWxH)		980x620x1000mm/1090x630x1120mm	980x620x1000mm/1090x630x1120mm
<p>Food progressing with abrasion resistant high pressure hose blue, self-supporting, robust, corrossions free, rotation-moulded device-chassis for food industry, stainless steel, impact-resistant device-cover made of ABS, triplex-piston pump with chrome, nickel plated pump head (hot water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, start-stop system with switch-off delay, total-switch-off after 20min, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, 4 large rubber wheels for rough terrain, with a patented wheel brake 2-way, storage possibility for all accessories, robust rotary on-off switch, 7,5m connection cable, removable ergonomic drawbar stainless steel.</p>			
Art. No.		551003	551004