
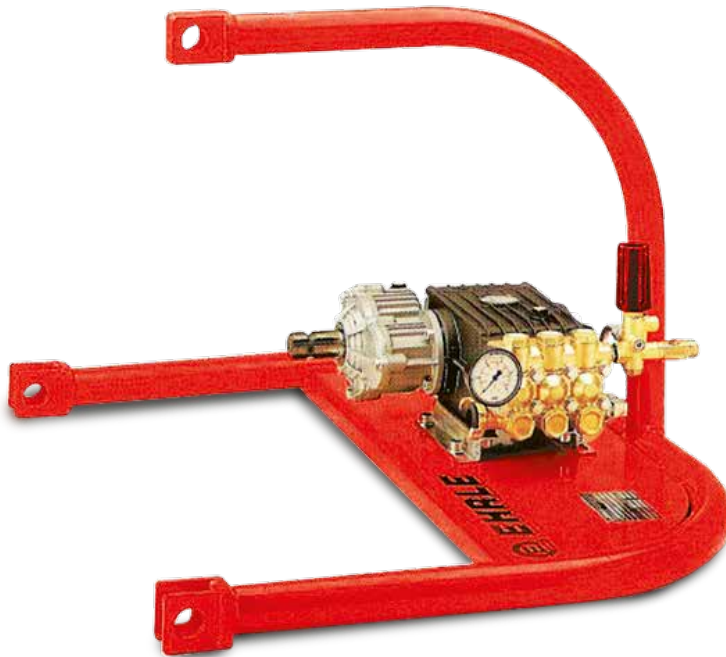


High Pressure Cleaner

Cold water, stationary - Series KW

KW1200



Type		KW1200 P.T.O. driven	KW1200 Hydraulic driven
Engine		P.T.O. Shaft: 525rpm - i: 1:1,9	Hydraulic Power: 36l/min @180bar
Power Consumption		6,5kW/9hp	11kW/15hp
Mounting/Connection		Plate Size 3 - P.T.O. 1 3/8"	2m DN16/BG3 - DN12/BG3
Operating pressure	30-180bar/3-18MPa	<ul style="list-style-type: none"> ▶ 10m HP-Hose DN08 - 315bar ▶ Trigger-Gun with swivel ▶ Spray-Lance 900mm c/w vario nozzle ▶ Stainless-Steel Jet-Nozzle 25° ▶ Spray-Lance 900mm c/w Rotary-Nozzle ▶ Detergent-Supply c/w Low-Pressure Injector and Metering-valve 	<ul style="list-style-type: none"> ▶ 10m HP-Hose DN08 - 315bar ▶ Trigger-Gun with swivel ▶ Spray-Lance 900mm c/w vario nozzle ▶ Stainless-Steel Jet-Nozzle 25° ▶ Spray-Lance 900mm c/w Rotary-Nozzle ▶ Detergent-Supply c/w Low-Pressure Injector and Metering-valve
Max. pressure	200bar/20Mpa		
Discharge capacity	300-1000l/h		
Nozzle size	070		
Max. Inlet temperature	45°C		
Pump speed	1000rpm		
Weight net/with package		-	-
Dimensions device/with package (LxWxH)		-	-
<p>Robust, corrosion-resistant, self-supporting device-plate for mounting size 3, made of robust steel pipe galvanized and powder-coated, triplex-piston pump with brass pump head, high-performance ceramic piston, stainless-steel valves, leakage-return, 2-fold safety system, unloader safety-valve c/w Infinitely variable pressure and quantity regulation and safety-valve, external detergent supply. P.T.O. gearbox for high-pressure pump size: 1 3/8" P.T.O. Hydraulic-drive: supply-line: DN12 c/w Coupling size GR3 - back-flow dn16 c/w Coupling size GR3 (pressureless).</p>			
Art. No.		201	204