


High Pressure Cleaner

Hot water, stationary, oil heated - Series HSC

HSC1240

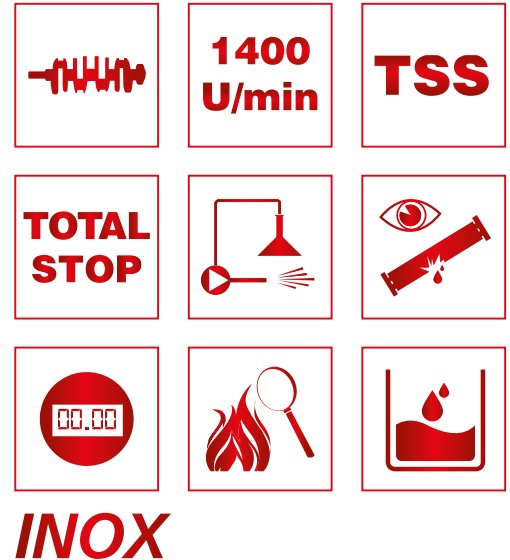

Type		HSC1240	HSC1240-INOX
Voltage	3/PE/AC/50Hz/415V	<ul style="list-style-type: none"> ▶ Etronic II - Controls ▶ 10m HP-Hose DN08 - 315bar ▶ Trigger-Gun with swivel ▶ Spray-Lance 900mm c/w Nozzle-Protection ▶ Stainless-Steel Jet-Nozzle 25° ▶ Water-Supply separation acc. water reg. ▶ Chemical supply in high-pressure Jet c/w Metering-valve 	<ul style="list-style-type: none"> ▶ Stainless steel (food safe) ▶ Etronic II - Controls ▶ 10m HP-Hose DN08 - 315bar ▶ Trigger-Gun with swivel ▶ Spray-Lance 900mm c/w Nozzle-Protection ▶ Stainless-Steel Jet-Nozzle 25° ▶ Water-Supply separation acc. water reg. ▶ Chemical supply in high-pressure Jet c/w Metering-valve
Operating pressure	30-160bar/3-16MPa		
Max. pressure	180bar/18MPa		
Discharge capacity	300-1200l/h		
Nozzle size	070		
Hot water capacity	30-98°C		
Pump speed	1400rpm		
Connected load	7,6kW/14,1A		
Electrical protection	3x16A slow-blowing		
Weight net/with package		301kg/318kg	300kg/317kg
Dimensions device/with package (LxWxH)		1220x755x1625mm/1250x815x1755mm	1220x755x1625mm/1250x815x1755mm
<p>Self-supporting, robust, device-chassis made from galvanized steel and powder-coated (option INOX: device-chassis made out of stainless-steel), suitable for floor installation, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (start-stop system with switch-off delay, total-switch-off after 20min, OPH-counter with service information, optical flame monitoring with photoelectric cell and fault indicator-light) 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, integrated diesel-tank 60l, separate space for 2 x 20l cleaning detergent-container c/w Remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. Pump, heating and detergent, 7,5m connection cable.</p>			
Art. No.		52801	528